


PE4C V4.1

PCIe x16 Adapter

Product > eGPU > PE4C V4.1

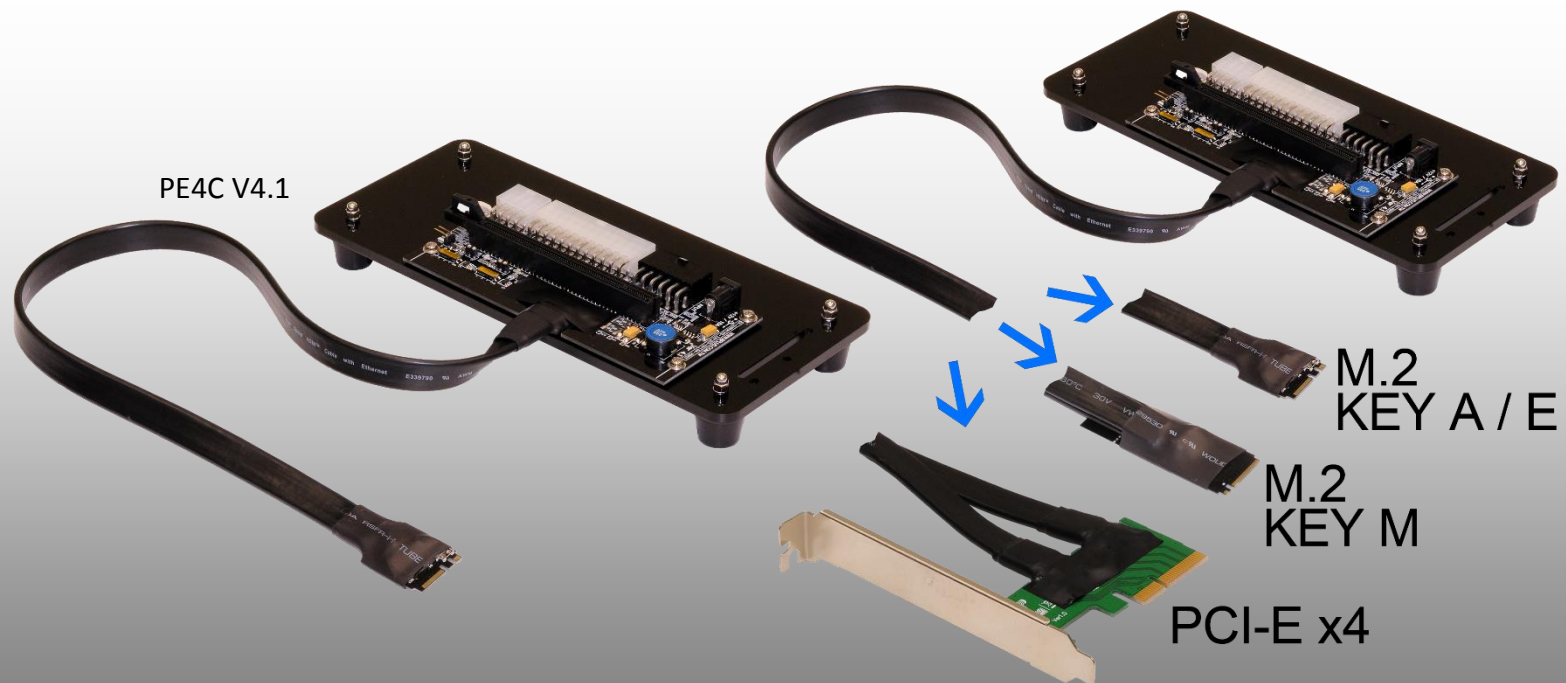

First Impression

The PE4C V4.1 is designed for Notebook PCs that converts PCI Express 16X Add-on Card to M.2 Card or PCIe x4 connector with up to Gen2 speed.

This adapter allows you to use your existing PCI-E 16X Card in the notebook PC for gaming.

Function

- ◆ VGA card connection to computer or notebook PC
- ◆ Support two delay switch to avoid registration problems when boot. (SW1, SW2)
- ◆ Special foot cone, avoid graphics card fan noise.
- ◆ Support [ATX power](#) boot together function.
- ◆ DC Jack: External 12V Power Input.
- ◆ Support Suspend Clock
- ◆ Support two sets external pin to setup delay time. (J2, J3)
- ◆ Option Products :
 - PE4C-M2060A V4.1 –PCI-E to M.2 Key A/E card adapter
 - PE4C-M4060A V4.1 –PCI-E to M.2 Key M card adapter
 - PE4C-H4060A V4.1 –PCI-E to PCI-E adapter

Specification

- ◆ **PE4C-M2060A V4.1** allows user to test PCI Express x16 Add-in-Card on the **M.2 Key A/E card slot**. – Cable 60cm
- ◆ **PE4C-M4060A V4.1** allows user to test PCI Express x16 Add-in-Card on the **M.2 Key M card slot**. – Cable 60cm
- ◆ **PE4C-H4060A V4.1** allows user to test PCI Express x16 Add-in-Card on the **PCI-e slot** – Cable 60cm
- ◆ **Compliant with PCI Express 2.0 Specification:** Maximum 5Gbps
- ◆ Power Supply: ATX PSU, 12V DC Jack adapter, 8PIN connector (for D220P AC adapter), **Three select one.**

System Requirements

- Notebook PC or Desktop PC with an available **M.2 Key A/E** or **Key M Card slot** or **PCI-E slot**
- Windows, Linux

Notice:

1. PE4C V4.1 is PCIe 4-Lane 5.0Gbps bandwidth limit passive adapter in compliance with M.2(NGFF) specification.
2. Basically, PCIe add-on card designed for desktop. We can't guarantee its compatibility with your laptop. Depends on OS version, notebook's BIOS, device driver,
3. Almost PCIe 16x video card can't get enough memory resource are allocated. Can't work in your laptop.
4. External Power ATX Power required.
5. All of interoperability is not guaranteed.

Dimension & Weight

22cm x 9.5cm x 4cm
200g


Certification

RoHS

Operating Temperature

0 ~ 70°C

PE4C-M2060A V4.1 Package Contents

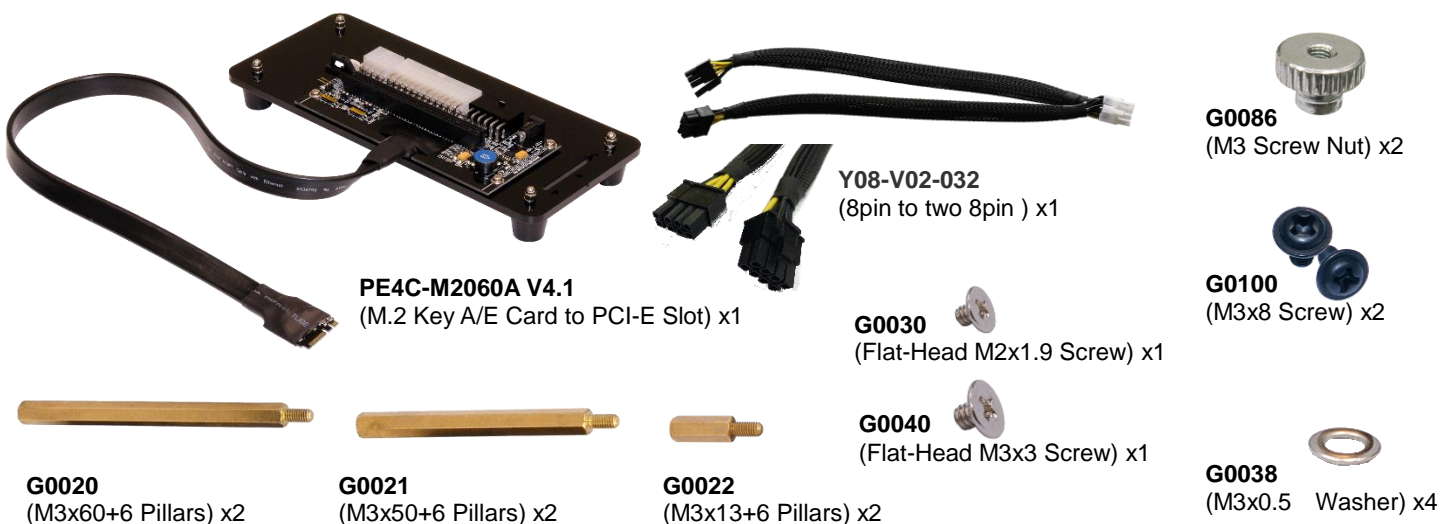

PE4C-M4060A V4.1 Package Contents



PE4C-H4060A V4.1 Package Contents

